




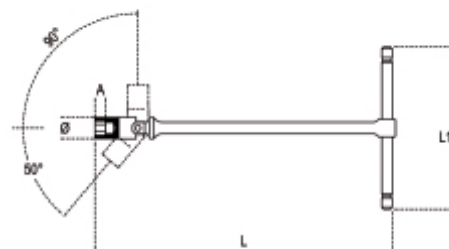

The T-handle wrench Beta 952 is suitable for quick, repeated screwing operations. The articulated joint maintains its function over the years, no adjustment being required.

**Features:**

- Swivelling mechanism allows socket pre-positioning at an angle of up to 50°
- Reduce tightening effort to 90° in fixed position during use
- Sliding handle can be stopped in required position; a safety catch prevents sliding handle from coming out
- Triple size marking on head
- Inch sizes



	art.		Ø mm	A mm	L mm	L1 mm	g
<b>009520256</b>	952AS 1/4	1/4	9,5	5,0	395	145	165
<b>009520258</b>	952AS 5/16	5/16	12,1	6,0	395	165	165
<b>009520260</b>	952AS 3/8	3/8	14,6	8,0	400	160	165
<b>009520261</b>	952AS 7/16	7/16	15,8	8,0	400	160	280
<b>009520263</b>	952AS 1/2	1/2	18,7	10,0	432	175	385
<b>009520264</b>	952AS 9/16	9/16	19,7	10,0	432	175	385
<b>009520266</b>	952AS 5/8	5/8	22,0	11,0	450	200	580
<b>009520267</b>	952AS 11/16	11/16	23,4	12,0	450	200	580
<b>009520269</b>	952AS 3/4	3/4	26,0	13,0	500	230	905